


QUICK STICKPROPP TYP P 16 A

Skruvlös stickpropp för 16 A med snabbkoppling.
Anslutningsbar ledararea 1-2,5 mm².
Kapslingsklass IP44



E24 253 87

In	16 A	16 A	16 A
Poltal	3	4	5
a	118	124	131
b	82	88	95
c	47	53	61
K	6-15	6-15	8-16
SW	38	38	42
Vikt kg	0,110	0,135	0,158

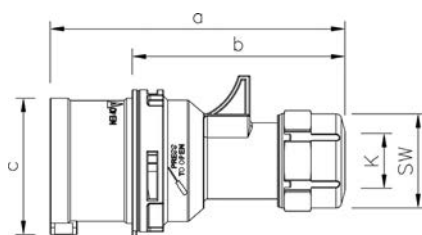

Poltal	E-nummer	Typ	Driftspänning V	Frekvens Hz	Klockslag/ färgkod	Förp storl
3 2p + E	24 253 83	P 216-2 Q	>50	>300-500	2 ■	10
	24 253 84	P 216-3 Q	>50-250	DC	3 ■	10
	24 253 85	P 216-4 Q	100-130	50/60	4 ■	10
	24 253 86	P 216-5 Q	277	60	5 ■	10
	24 253 87	P 216-6 Q	200-250	50/60	6 ■	10
	24 253 88	P 216-7 Q	480-500	50/60	7 ■	10
	24 253 89	P 216-9 Q	380-415	50/60	9 ■	10
	24 253 90	P 216-12 Q	—	50/60	12 ■	10
4 3p + E	24 253 91	P 316-2 Q	>50	>300-500	2 ■	10
	24 253 92	P 316-3 Q	380-440	50/60	3 ■	10
	24 253 93	P 316-4 Q	100-130	50/60	4 ■	10
	24 253 94	P 316-5 Q	600-690	50/60	5 ■	10
	24 253 95	P 316-6 Q	400	50/60	6 ■	10
	24 253 96	P 316-7 Q	480-500	50/60	7 ■	10
	24 253 97	P 316-9 Q	230	50/60	9 ■	10
	24 253 98	P 316-10 Q	>50	100-300	10 ■	10
	24 253 99	P 316-11 Q	440-460	60	11 ■	10
5 3p + N + E	24 254 00	P 416-2 Q	>50	>300-500	2 ■	10
	24 254 01	P 416-3 Q	380-440	50-60	3 ■	10
	24 254 02	P 416-4 Q	100-130	50/60	4 ■	10
	24 254 03	P 416-5 Q	600-690	50/60	5 ■	10
	24 254 04	P 416-6 Q	230/400	50/60	6 ■	10
	24 254 05	P 416-7 Q	480-500	50/60	7 ■	10
	24 254 06	P 416-9 Q	208-250	50/60	9 ■	10
	24 254 07	P 416-11 Q	440-4 Q60	60	11 ■	10


QUICK STICKPROPP TYP P 32 A

Skruvlös stickpropp för 32 A med snabbkoppling.
Anslutningsbar ledararea 2,5-6 mm².
Kapslingsklass IP44



E24 254 11

In	32 A	32 A	32 A
Polital	3	4	5
a	146	146	152
b	100	100	106
c	63	63	70
K	10-20	10-20	12-22
SW	50	50	50
Vikt kg	0,187	0,208	0,242

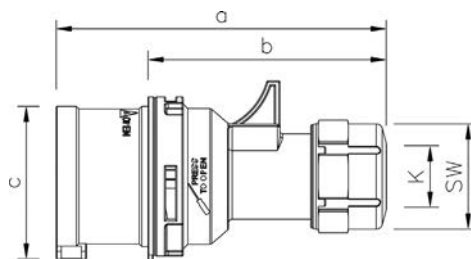

Polital	E-nummer	Typ	Driftspänning V	Frekvens Hz	Klockslag/ färgkod	Förp storl
3 2p + E	24 254 08	P 232-2 Q	>50	>300-500	2 ■	10
	24 254 09	P 232-3 Q	>50-250	DC	3 ■	10
	24 254 10	P 232-4 Q	100-130	50/60	4 ■	10
	24 254 11	P 232-6 Q	200-250	50/60	6 ■	10
	24 254 12	P 232-7 Q	480-500	50/60	7 ■	10
	24 254 13	P 232-9 Q	380-415	50/60	9 ■	10
	24 254 14	P 232-12 Q		50/60	12 ■	10
4 3p + E	24 254 15	P 332-2 Q	>50	>300-500	2 ■	10
	24 254 16	P 332-3 Q	380-440	50/60	3 ■	10
	24 254 17	P 332-4 Q	100-130	50/60	4 ■	10
	24 254 18	P 332-5 Q	600-660	50/60	5 ■	10
	24 254 19	P 332-6 Q	400	50/60	6 ■	10
	24 254 20	P 332-7 Q	480-500	50/60	7 ■	10
	24 254 21	P 332-9 Q	230	50/60	9 ■	10
	24 254 22	P 332-10 Q	>50	100-300	10 ■	10
	24 254 23	P 332-11 Q	440-460	60	11 ■	10
5 3p + N + E	24 254 24	P 432-2 Q	>50	>300-500	2 ■	10
	24 254 25	P 432-3 Q	380-440	50-60	3 ■	10
	24 254 26	P 432-4 Q	100-130	50/60	4 ■	10
	24 254 27	P 432-5 Q	600-690	50/60	5 ■	10
	24 254 28	P 432-6 Q	230/400	50/60	6 ■	10
	24 254 29	P 432-7 Q	480-500	50/60	7 ■	10
	24 254 30	P 432-9 Q	208-250	50/60	9 ■	10
	24 254 31	P 432-11 Q	440-4 Q60	60	11 ■	10