



MASTER TL5 High Efficiency



MASTER TL5 HE 21W/830 SLV/40

This TL5 lamp (tube diameter 16 mm) has a high luminous efficacy, resulting in low energy consumption. The High Efficiency TL5 lamp offers excellent lumen maintenance and good color rendering. Application areas are offices, industry, public and governmental buildings, schools, hospitals and indoor sports lighting.

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information				
Cap-Base	G5 [G5]			
Features	na [Not Applicable] Sphere			
Flux measurement reference				
Light Technical				
Color Code	830 [CCT of 3000K]			
Luminous Flux	1,900 lm			
Color Designation	Warm White (WW) 0.44			
Chromaticity Coordinate X (Nom)				
Chromaticity Coordinate Y (Nom)	0.403			
Correlated Color Temperature (Nom)	3000 K			
Luminous Efficacy (rated) (Nom)	90 lm/W 82			
Color rendering index (CRI)				

Power Consumption	20.8 W		
Lamp Current (Nom)	0.165 A		
Controls and Dimming			
Dimmable	Yes		
Mechanical and Housing			
Bulb Shape	T5 [16 mm (T5)]		
Approval and Application			
Energy Efficiency Class	G		
Mercury (Hg) Content (Nom)	1.2 mg		
Energy Consumption kWh/1000 h	21 kWh		
EPREL Registration Number	423452		


Datasheet, 2024, January 8 data subject to change

MASTER TL5 High Efficiency

Product Data				
Order product name	MASTER TL5 HE 21W/830 SLV/40			
Full product name	MASTER TL5 HE 21W/830 SLV/40			
Full product code	871150063942455			
Order code	927926283055			
Material Nr. (12NC)	927926283055			


Numerator - Quantity Per Pack	1		
EAN/UPC - Product/Case	8711500639424		
Numerator - Packs per outer box	40		
EAN/UPC - Case	8711500867544		

Dimensional drawing

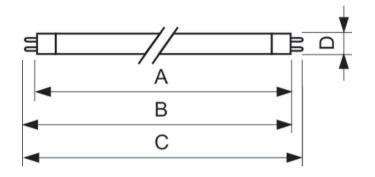


Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HE 21W/830	17 mm	849.0 mm	856.1 mm	853.7 mm	863.2 mm
SLV/40					


Photometric data

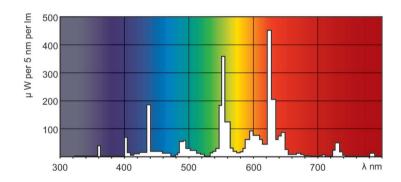

Spectral Power Distribution Colour - MASTER TL5 HE 21W/830 SLV/40

Lifetime

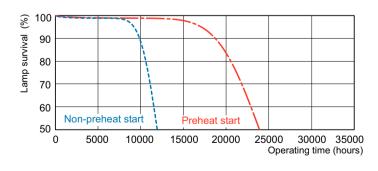




Life Expectancy Diagram - MASTER TL5 HE 21W/830 SLV/40

Life Expectancy Diagram - MASTER TL5 HE 21W/830 SLV/40

MASTER TL5 High Efficiency

Lifetime

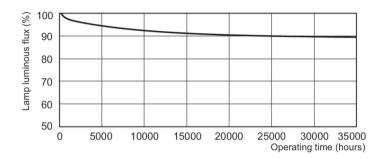

Lumen Maintenance Diagram - MASTER TL5 HE 21W/830 SLV/40

