



Plexo™


2 P+E socket outlets - German Standard

Cat. No(s): 0 695 71 - 0 696 39 - 0 697 33/71
0 698 33/34/68/69 - 0 707 22/72/73

0 695 71 - 0 696 39



0 698 34/68



0 697 33/71

1. USE

2 P+E socket outlets with shutters.

1. Waterproof electrical equipment for residential and professional technical installations (garages, cellars, car parks, workshops, industrial kitchens, etc.) and outdoor environments (terraces, gardens, camp sites, etc.).

2. Waterproof wiring devices system made of silver-ion based antimicrobial* material.


This technology eliminates bacteria, fungi and viruses without creating any immunisation or resistance effects (physical, rather than chemical, destruction).

Particularly suitable for areas subject to hygiene restrictions (industrial, shared and restaurant kitchens, waste, etc.).

These products offer an additional way of ensuring the non-proliferation of bacteria, fungi and viruses without interfering with cleaning protocols.

2. RANGE


Designation	Colour	References		
		Composable	Surface mounting complete	Flush mounting complete
2 P+E socket with screws	Grey	0 695 71	0 697 33	0 698 33
	White	0 696 39	0 697 71	0 698 69
	White antimicrobial*	0 707 22	-	0 707 72
2 P+E socket with claws	Grey	-	-	0 698 34
	White	-	-	0 698 68
	White antimicrobial*	-	-	0 707 73

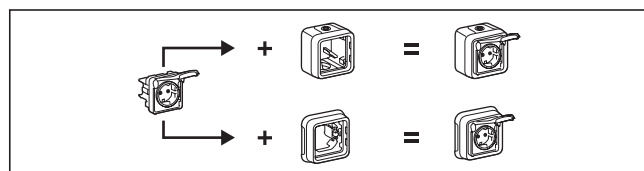

3. INSTALLATION

■ 3.1 Surface mounting


- Back body is mounted on the support using two screws, max. Ø 3 to 4 mm.




3. INSTALLATION (continued)

■ 3.2 Flush mounting


- Frame dismantling

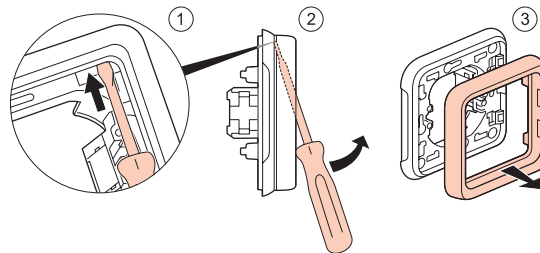

- By screwing onto a flush-mounting box



- By claws onto a flush-mounting box





Possibility to place claws:
Cat. No. 0 849 00 or Cat. No. 0 849 01 (long claw)

- Screw-mounted in flush-mounting box.


- Mounting on base plate using 4 screws, Ø 4 mm.

Opening cut in base-plate, Ø 60 - 70 mm using a circular saw or a punch



4. CONNECTION


■ Connection to conductors




Type of terminals: with screws
Terminal capacity: 1.5 mm² and 2.5 mm² (1 or 2 wires).
Max. tightening torque: 0.8 Nm
Screwdriver required: flat blade 3.5 to 5 mm, or Phillips No.1
Stripping length: 8 mm.

5. DIMENSIONS (mm)


Composable

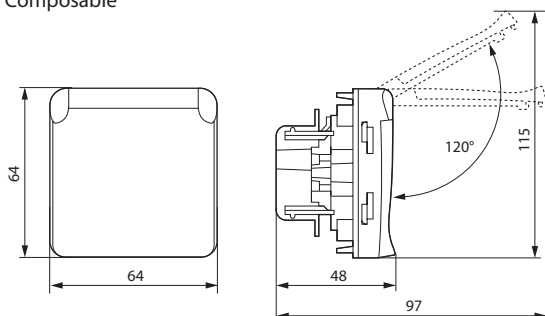

Surface mounting

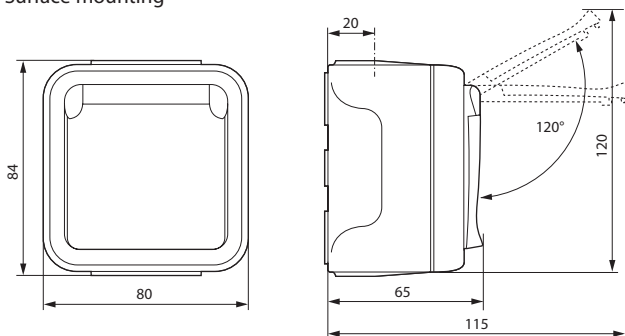

Flush-mounting

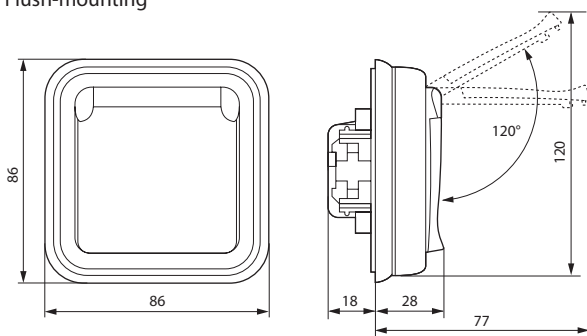

6. GENERAL CHARACTERISTICS

■ 6.1 Protection index (shutter closed)

Protection against solid bodies and liquids: IP 55
Protection against impact: IK 07

■ 6.2 Material characteristics

Box, support: PP (filled Polypropylene)
Plate, flap: ABS
Entry gland: PP + SEBS
Mechanism: PC
With antimicrobial* treatment for Ref. 0 707 22/72/73.

6. GENERAL CHARACTERISTICS (continued)

UV resistant.
Resistance to salt spray: 7 days (168 h)

Self-extinguishing:
+ 850°C / 30 s for insulating components holding in place live parts.
+ 650°C / 30 s for the other insulating components.

■ 6.3 Electrical characteristics

Current: 16 A
Voltage: 250 V~
Frequency: 50 Hz

■ 6.4 Climatic characteristics

Storage temperature: - 25° C to +70° C
Use temperature: - 25° C to + 40° C

7. CLEANING

Surfaces may be cleaned using a cloth, either dry or with soapy water.
Do not use acetone, spirits or trichloroethylene.

Caution: Conduct preliminary tests before using any specific cleaning product.

8. COMPLIANCES AND APPROVALS

Compliance with standards of installation and manufacturing.
Refer to e.catalogue.

* Contains a silver compound to antagonize the growth of bacteria on the surface.