

Excel Category 5e Patch Lead U/UTP Unshielded LS0H Blade Booted 20m - Grey

Item Code: BB200MPLGE

excel
without compromise.



✕ Category 5e

✕ Independently verified

✕ Supports Gigabit ethernet

✕ Choice of colours

✕ T568B wiring

✕ Blade style 'slimline' moulded strain relief boot with clip protector

Product Overview

Excel Category 5e U/UTP Patch Leads are manufactured, tested, and independently verified to the ISO11801 and EN 50173 Category 5 and EIA/TIA standards for enhanced performance.

Each cable consists of 8 colour coded stranded 24AWG conductors twisted together to form 4 pairs with varying lay lengths. Cables are fitted with plastic strain relief boots, for applications that may require continuous patching or a degree of stress relief applied.

Product Specifications


Feature	Values
Cable type	U/UTP
Category	5E
Length	20 m
Type of connector connection 1	RJ45 8(8)
Type of connector connection 2	RJ45 8(8)
Outer sheath colour	Grey
Strain relief boot	Moulded-on
Strain relief boot colour	Grey
Cable construction	1x4
AWG-size	24
Pin assignment	1:1

Excel Category 5e Patch Lead U/UTP Unshielded LS0H Blade Booted 20m - Grey

Item Code: BB200MPLGE



Product drawing

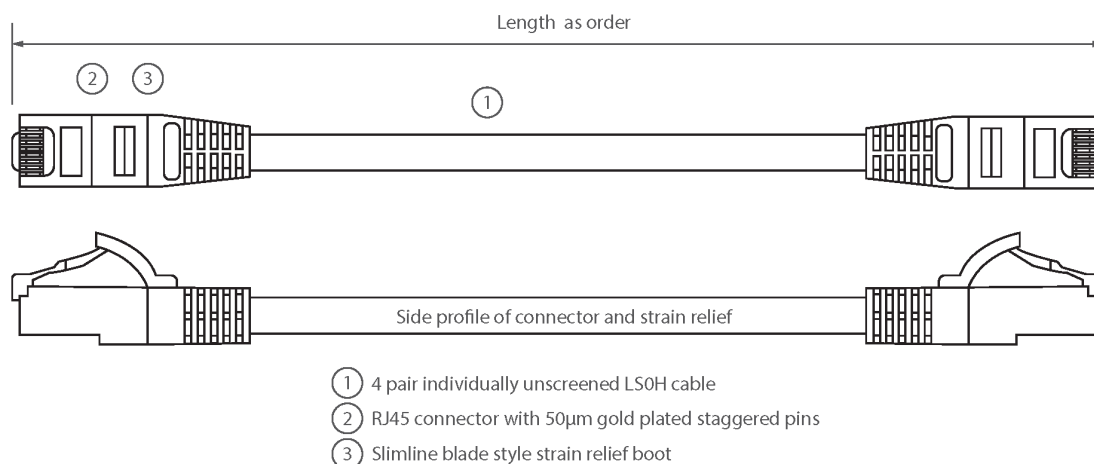

Standards

Applicable standard	Detail
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
EN 50173-1:2011	Information technology. Generic cabling systems - General requirements
ANSI/TIA 568-2.D	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 61156-5:2009+AMD1:2012 CSV	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 61034-2:2005+A1:2013	Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements
RoHS	Restriction of Hazardous Substances - Compliant

Excel Category 5e Patch Lead U/UTP Unshielded LSOH Blade Booted 20m - Grey

Item Code: BB200MPLGE



Part Number Table

Part Number	Description
BB200MPLGE	EXCEL C5E U/UTP BLADE PATCH LEAD LSOH 20M GREY

Excel is a world class premium performing end to end infrastructure solution designed,
Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.