



Lima

- Stylish linear luminaire with high quality aluminum housing, suitable for surface mounting and suspended use
- Suitable for use in office
- Suspension kit including transparent cable as accessory
- Connection kit accessory to create continuous lines available



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	UGR	CCT (K)	Weight (kg/pc)
DALI								
542005001600	LEDLima L15-36W-4000-U22-DALI	TL 1x80W	36	4140	115	≤ 22	4000	3.08

Accessories



599006009000
LEDLima Suspension-Kit

599006008900
LEDLima Connection-Kit

Packaging Information

Item			Box			
Item Code	Item Description	Commodity Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
542005001600	LEDLima L15-36W-4000-U22-DALI	94051190	1574x75x75	3.47	6956321807108	1
599006008900	LEDLima Connection-Kit	73269098	230x70x90	0.35	6956321809263	1
599006009000	LEDLima Suspension-Kit	73121020	150x150x10	0.35	6956321809249	1

Technical Specifications

Lifetime (L70)	70,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	100,000
Dimmability	DALI
Beam angle	70°
Finishing	Aluminum
Colour rendering index CRI	≥ 80
Degree of protection (IP)	IP20
Impact strength	IK02
Protection class	I
Risk group (EN 62471)	RG0
With control gear	Yes
Glow wire test	650°C
Driver failure rate (at 5,000 hrs)	0.5 %
Power factor	≥ 0.9

Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V AC
DC input voltage	See catalogue appendix Connection Specifications


Mechanical Properties

Housing material	Aluminium
Optical material	Polycarbonate

Ambient Conditions


Operating temperature	-10~+45°C
Application temperature	+25°C
Storage environment	-25~+50°C

5 YEARS WARRANTY

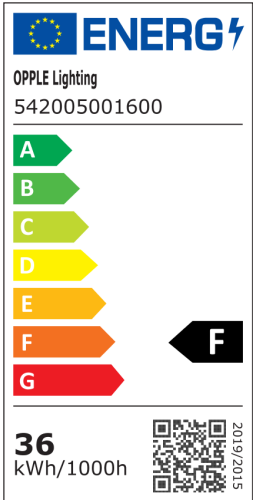

Dimensional Drawing (mm)

LEDLima L15

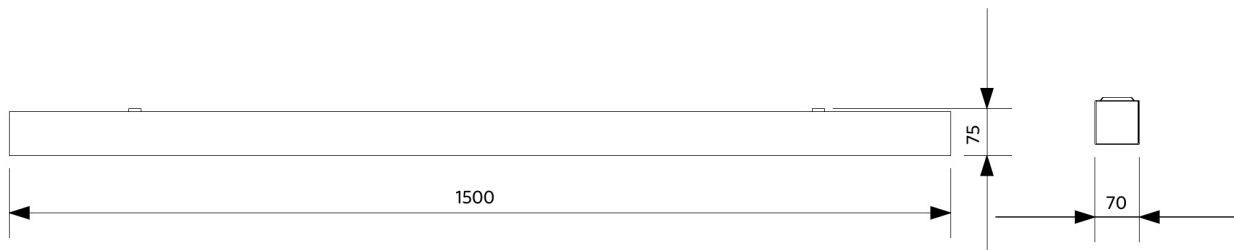

Photometric Data

