


P 45 primary profile

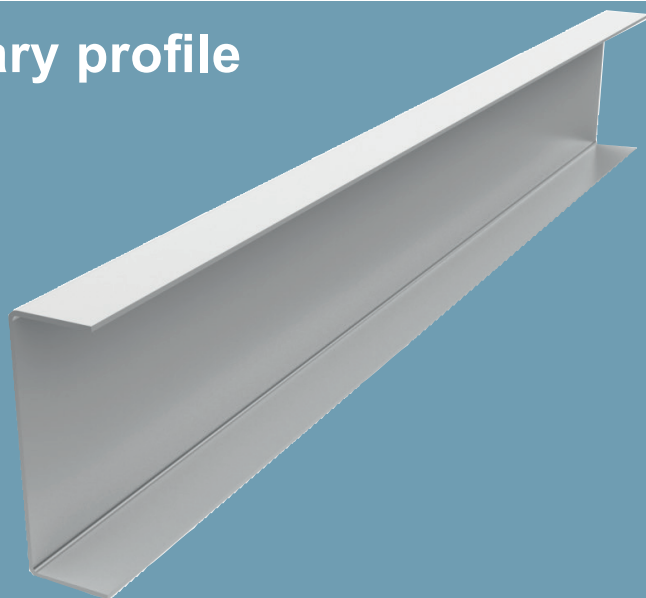

P 45 Primary profile for ceilings EN 14195

Side: 1/1

11/2016

PRODUCT DATA

CHARACTERISTIC		VALUE	UNIT
Fire	Reaction to fire	A1	Incombustible
Strength	Yield point	250	N/mm ²
Contents	Hazardous contents	NPD	
Surface	Zinc	275	g/m ²
Corrosion class		C2	
Measurements	Widths ± 0.5	45	mm
	Thickness	0,90	mm
	Length	$\pm + 0 / - 3$	
	Other - see drawing	± 1	mm

Areas of use

Used for suspended ceiling to which mounting profiles and straps are to be fastened.

For non-bearing constructions in buildings with plasterboard according to EN 520 or reprocessed products according to EN 14190.

Profiles produced according to EN 14195.

PROFILE DATA

	t	h	A	I _y	W _y
Profile	mm	mm	mm ²	mm ⁴	mm ³
P 45	0,90	45	63,4	$1,91 \times 10^4$	$0,83 \times 10^3$

Steel quality: S250GD+Z275

