


Basic Series



420

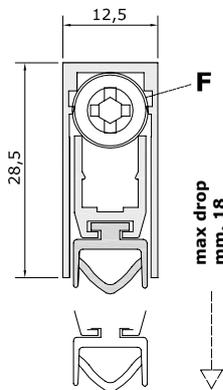

Certified for:


- Sound insulation **34 dB**
- Fire resistance: **30 min.** (EPDM standard gasket) **60 min.** (optional silicon gasket)
- Insulation from smoke **2,30 m³ / h / m - 25 Pa**
- Usage cycles **200.000 cycles**

Protects from:

- Air
- Water
- Light
- Insects


Not an obstacle for disabled persons

STANDARD ACCESSORIES

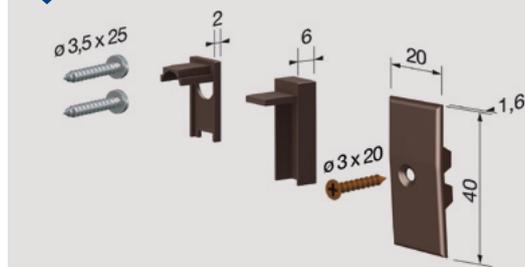

Standard measurements (mm)	330	430	530	630	730	830	930	1030	1130	1230	1330
Max shortening (mm)	130	130	200	200	200	200	200	200	200	200	200

FASTENING SYSTEMS

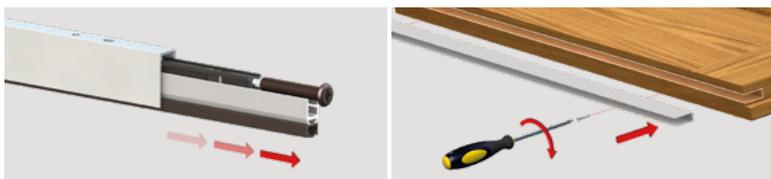

Remove and screw

Mechanism with a single adjustment (screw F: descent) characterised by the controlled movement of the moving profile with gasket (immediate descent from the hinge side of the door and consequent gradual descent for the entire length) for adjustment to the floor.

STANDARD: Cardboard box with 40 pcs + 40 standard accessory packs.

MAIN APPLICATIONS



Wood door

Armoured door

Extruded profiles in aluminium alloy 6060 - tubular gasket in EPDM - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - Ø 5 mm brass bushing - coil springs in treated stainless steel.

OPTIONAL ACCESSORIES

Details on page 102

1 Nylon plate

CA101 CA102 CA104

100 pcs pack
 brown, white

2 Insulating nylon plate with silicon gasket

PI001 PI002 PI002-R

20 pcs pack
 brown, white


3 Using brackets

SC002A SC002B-422

20 pcs pack
 steel, brown

Application examples

Smooth frame

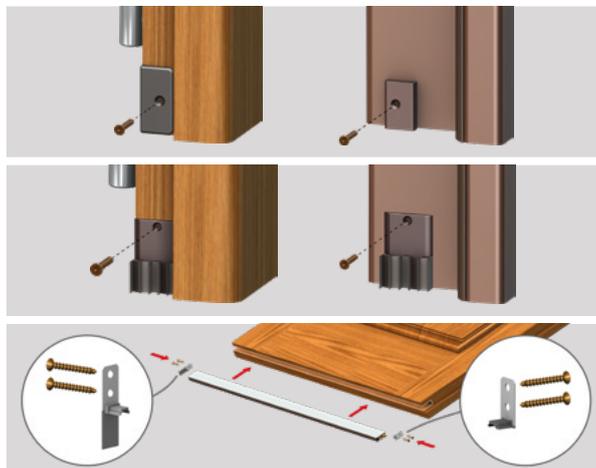

BUTTON (F): hexagonal brass, square nylon, bevelled nylon, rolling nylon (pivot). **GASKET:** silicon tubular, brush.

OPTIONAL: Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions.